




Justrite Safety Group

145 - PREFERENCE™
PRODUCT INFORMATION BROCHURE



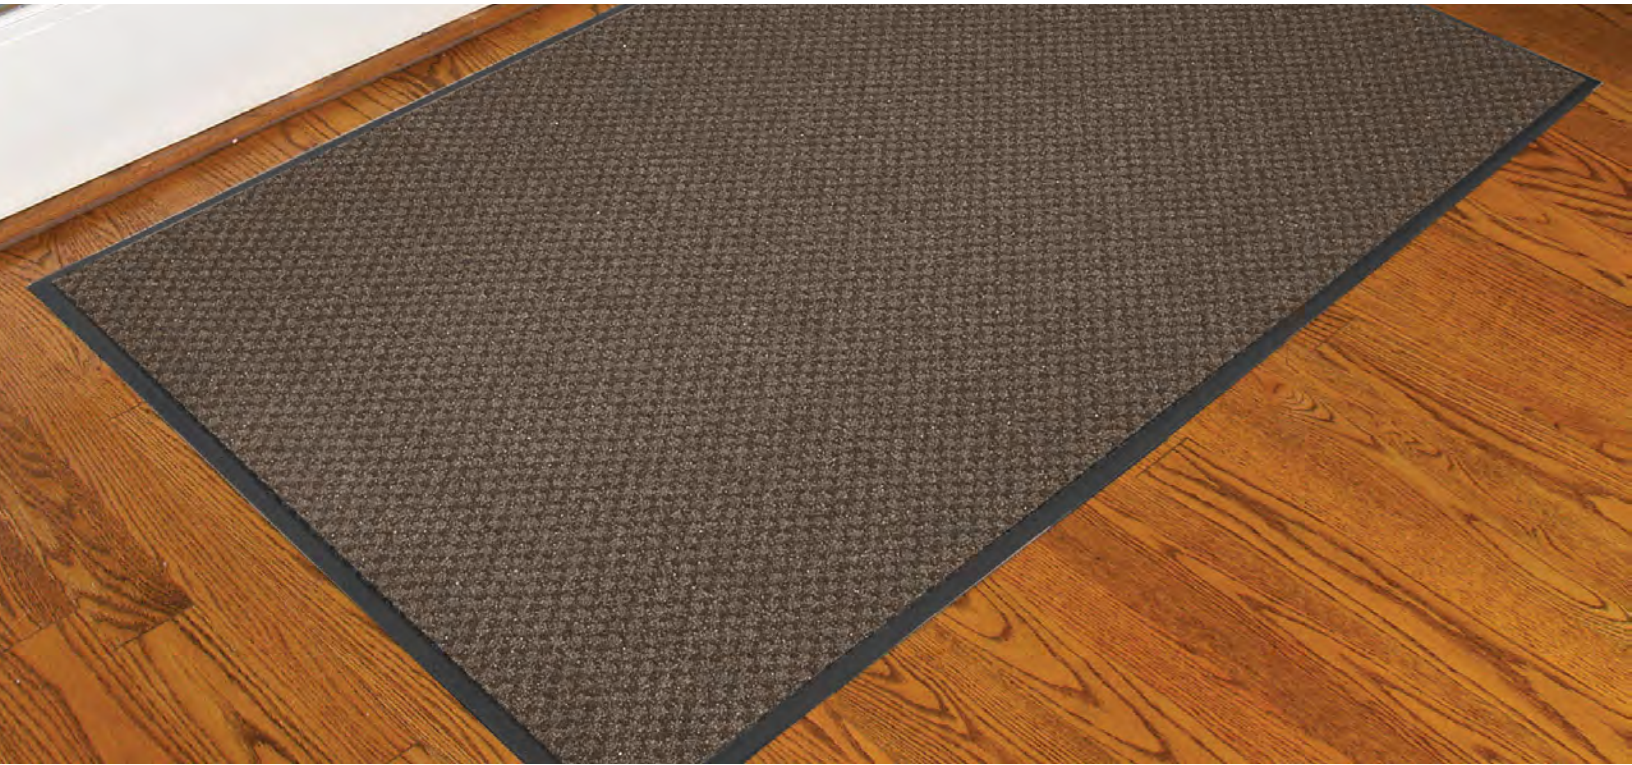

For over 70 years, the name Notrax[®] has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax[®] offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax[®] offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**



145 - PREFERENCE™ has a dual fiber surface of scraping and looped pile drying yarns in a mini checked pattern to absorb moisture and scrape dirt and debris from foot traffic. Color combinations blend light and dark colors to help camouflage debris while maintaining its contemporary appearance. Heavy weight vinyl anti-slip backing ensures minimum movement.

Material: Polypropylene Carpet W/Vinyl Backing

Features and Benefits:

- Scraper and drying mat
- A combination of Prelude™ scraping and looped pile Decalon® drying yarns in a mini-checked pattern.
- Dual-fiber, mini-checked pattern effectively traps debris and moisture while retaining its contemporary appearance.
- Low profile performs in narrow clearance doorways
- 26 ounces of needle-punched yarn per square yard.
- Vinyl backing ensures minimal buckling and mat movement.




MODEL: 145

SPECIFICATIONS

APPLICATIONS

- Offices
- Hotels
- Lobbies
- Upscale Entrances

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'		
Roll Sizes	3'x60', 4'x60', 6'x60'		
Thickness	3/8"		
Cut Lengths	3', 4', and 6' widths (up to 60' long)		
Colors	 Hunter Green	 Brown	 Charcoal

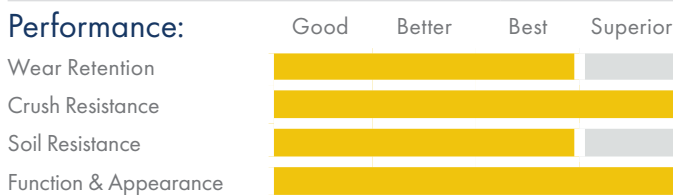

TESTING DATA

Test	Test Description	Results
ASTM D6540	Accelerated Soiling Method	Based on Visual Inspection 3.5 - Vacuum Rating 4.0 - Rating After Extraction
-	Water Retention	Weight Gain = 6.1% (0.06 gals./yd ²)
ASTM 5252-98a	Accelerated Wear - Sim Floor Machine	Appearance Rating @ 6,000 cycles 2.0 Appearance Rating @ 12,000 cycles 1.5
ASTM D3884	Abrasion Resistance	@ 5,000 cycles 1.44 grams (4.2%)
CPSC FF 1-70 ASTM D-2859	Surface Flammability of Carpets and Rugs Ignition Characteristics - Finished Textile Floor Covering Material	Pass

*Testing performed by an independent test laboratory.

NOTRAX®


5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com

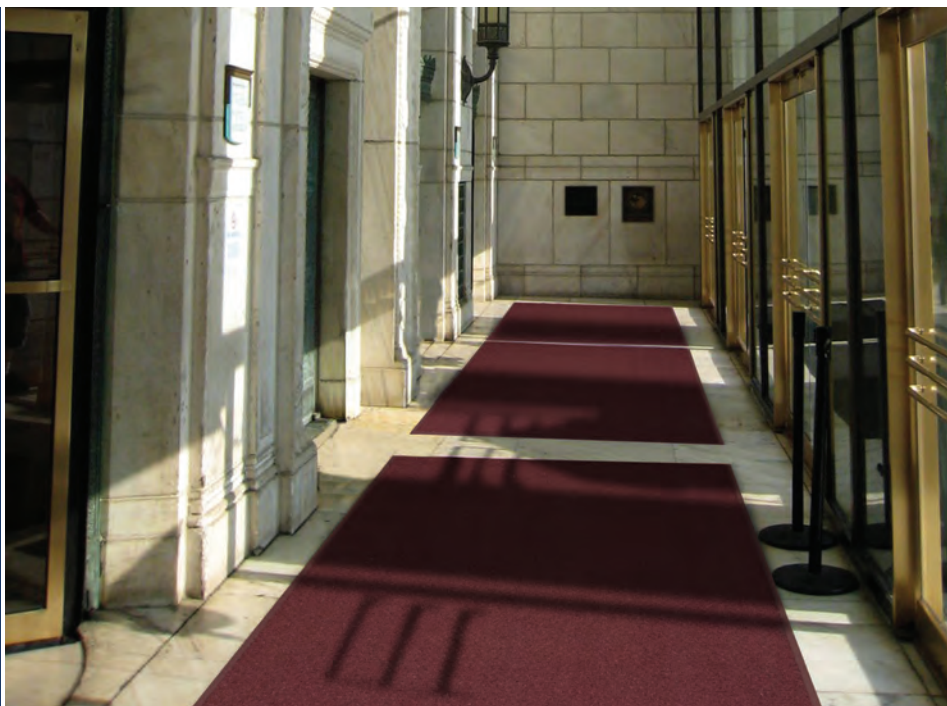

A PRODUCT OF:



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.